



# Calpeda NGL 3/100

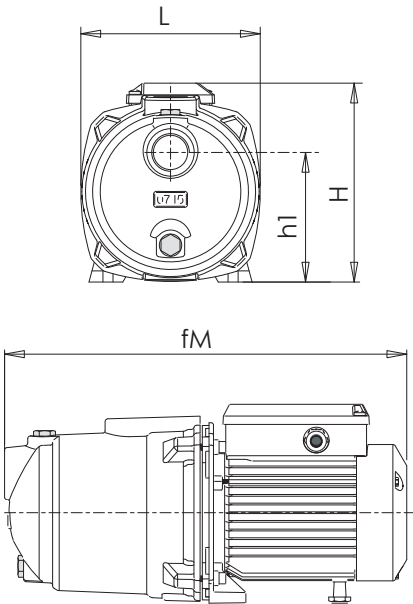

- Close-coupled, self-priming shallow well pump with built-in ejector
- Ideal for challenging suction conditions, such as boreholes or long supply pipes
- Durable cast iron construction for reliable performance

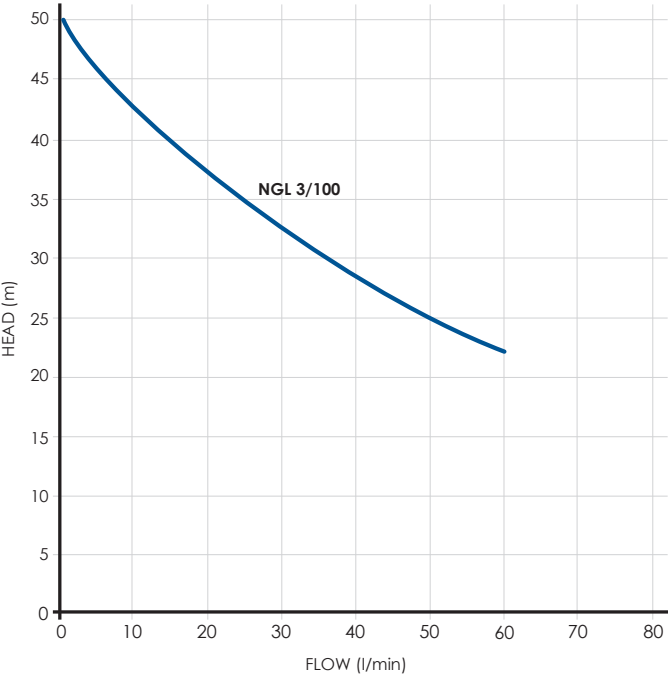

PERFORMANCE GUIDE						
Code	Max Head (m)	Max Flow (l/min)	Max Pressure (psi)	Max Suction Depth (m)	Inlet (mm)	Outlet (mm)
PUCALNGL3-100T	50	60	71	7	25	25

ELECTRICAL DATA								
Code	Current Type	kW	Hp	Amps	RPM/min	Insulation Class	Voltage (V)	Frequency (Hz)
PUCALNGL3-100T	Three	0.65	0.9	1.7	2800	F	230/400	50

DIMENSIONS + WEIGHTS					
Code	L (mm)	H (mm)	h1 (mm)	fM (mm)	Weight (kg)
PUCALNGL3-100T	161	192	116	391	12.1

