


Calpeda NGX Series



- Horizontal multi stage closed coupled self priming shallow well pump with built in ejector
- A high quality pump for domestic water supply
- Ideal for poor suction situations with a suction depth of up to 8 m
- Suitable for water supply and domestic use
- Stainless steel
- Self priming

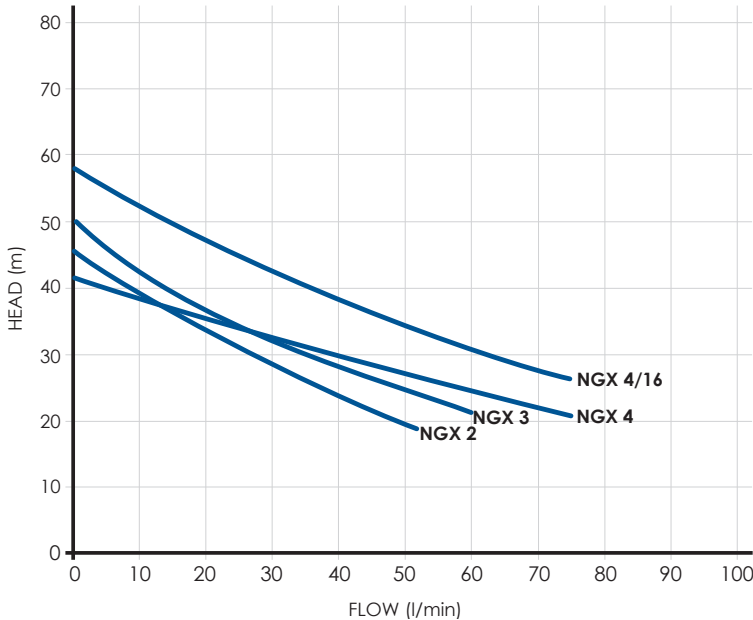

PERFORMANCE GUIDE						
Code	Max Head (m)	Max Flow (l/min)	Max Pressure (psi)	Max Suction Depth (m)	Inlet (mm)	Outlet (mm)
PUCALNGXM2/80M	46	55	65	7	25	25
PUCALNGXM3M	50	60	70	7	25	25
PUCALNGXM4M	42	75	60	7	25	25
PUCALNGXM4/16M	57.5	75	82	7	32	25

ELECTRICAL DATA									
Code	Current Type	kW	Hp	Amps	RPM/min	Capacitor (µF)	Insulation Class	Voltage (V)	Frequency (Hz)
PUCALNGXM2/80M	Single	0.55	0.8	3.8	2800	16	F	230	50
PUCALNGXM3M	Single	0.65	0.9	4.5	2800	16	F	230	50
PUCALNGXM4M	Single	0.75	1.0	5.4	2800	20	F	230	50
PUCALNGXM4/16M	Single	1.1	1.5	7	2800	30	F	230	50


AA41



Calpeda NGX Series



- Horizontal multi stage closed coupled self priming shallow well pump with built in ejector
- A high quality pump for domestic water supply
- Ideal for poor suction situations with a suction depth of up to 8m
- Suitable for water supply and domestic use
- Stainless steel
- Self priming

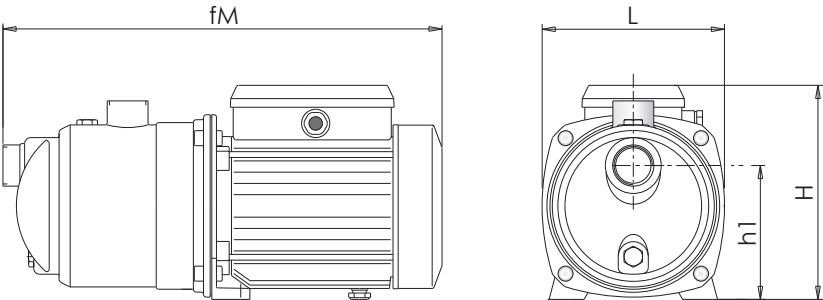

DIMENSIONS + WEIGHTS					
Code	fM (mm)	L (mm)	H (mm)	h1 (mm)	Weight (kg)
PUCALNGXM2/80M	362	161	176	116	7.1
PUCALNGXM3M	391	161	192	116	9.2
PUCALNGXM4M	391	161	192	116	14.8
PUCALNGXM4/16M	462	213.5	225	152	16.7

SERVICE PARTS + KITS			
Code	Component	Size (mm)	Pump
PUCALNGX2/80S/KIT	Service kit	-	NGX2/80

