


# Lowara Domo VX Series



- Stainless steel submersible vortex pump for pumping toilet waste (blackwater)
- Suitable for on site wastewater systems in rural and lifestyle properties
- Vortex impeller creates a whirlpool effect, passing solids (up to 35 mm on 7VX, 50 mm on 10VX/15VX) through the side discharge with minimal impeller contact to reduce blockages
- Single phase pumps include a float; three phase pumps are for manual or external control via sensors, PLCs or timers
- 10VX/15VX supplied with 10 m power cable; 7VX with 5 m cable
- Made in Italy

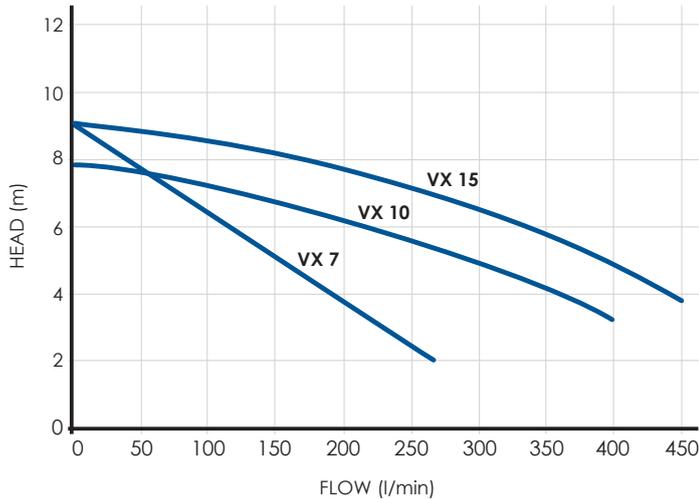

## PERFORMANCE GUIDE

Code	Max Head (m)	Max Flow (l/min)	Max Pressure (psi)	Max Submersible Depth (mm)	Max Solids (mm)	Outlet (mm)	Float
PULOWDOMO7VX	9	260	13	5	35	40	Y
PULOWDOMO10VX	7.5	400	11	5	50	50	Y
PULOWDOMO15VX	9	450	13	5	50	50	Y

PULOWDOMO10VXT	7.5	400	11	5	50	50	N
PULOWDOMO15VXT	9	450	13	5	50	50	N

## ELECTRICAL DATA

Code	Current Type	kW	Hp	Amps	RPM/min	Capacitor (µF)	Insulation Class	Voltage (V)	Frequency (Hz)
PULOWDOMO7VX	Single	0.55	0.75	3.91	2850	16	F	230	50
PULOWDOMO10VX	Single	0.75	1	5.88	2850	22	F	230	50
PULOWDOMO15VX	Single	1.1	1.5	6.11	2850	30	F	230	50



PULOWDOMO10VXT	Three	0.75	1	4.09/2.36	2850	-	F	230/400	50
PULOWDOMO15VXT	Three	1.1	1.5	4.31/2.49	2850	-	F	230/400	50



# Lowara Domo VX Series



- Stainless steel submersible vortex pump for pumping toilet waste (blackwater)
- Suitable for on site wastewater systems in rural and lifestyle properties
- Vortex impeller creates a whirlpool effect, passing solids (up to 35 mm on 7VX, 50 mm on 10VX/15VX) through the side discharge with minimal impeller contact to reduce blockages
- Single phase pumps include a float; three phase pumps are for manual or external control via sensors, PLCs or timers
- 10VX/15VX supplied with 10 m power cable; 7VX with 5 m cable
- Made in Italy

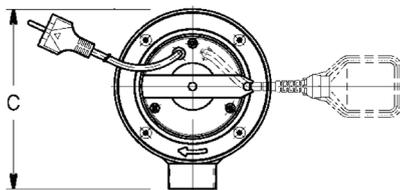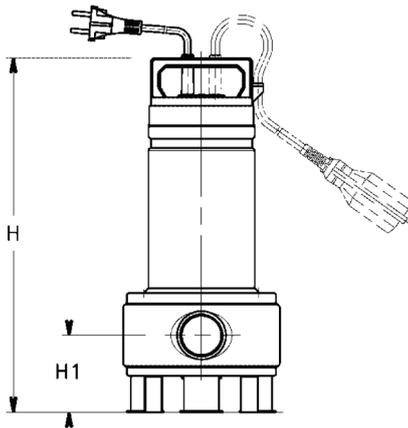

## DIMENSIONS + WEIGHTS

Code	H (mm)	H1 (mm)	C (mm)	Weight (kg)
PULOWDOMO7VX	386	88	193	11
PULOWDOMO10VX	463	111.5	198	14
PULOWDOMO15VX	463	111.5	198	15

PULOWDOMO10VXT	463	111.5	198	11
PULOWDOMO15VXT	463	111.5	198	14

All data, performance curves, and dimensions provided are for general guidance only. Performance may vary depending on operating conditions and fluid properties. Refer to the product manual for complete specifications, installation requirements, and confirmed dimensions. Specifications are subject to change without notice.

AA83

